




Raccordi a compressione per tubo «Winny-pex®»

Compression fittings for «Winny-pex®» pipe


NOTE TECNICHE / TECHNICAL DATA

Conformi alla norma DIN 50930.6 - Conformi al D.M. 174 del 6 Aprile 2004 - Conformi alla norma UNI EN ISO 1254-3
Comply with DIN 50930.6 - Comply with D.M. 174 dated 6 April 2004 - Comply with UNI EN ISO 1254-3

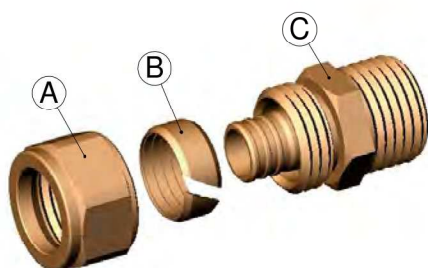

- IT** (A) Dado di serraggio stampato a caldo in ottone UNI EN 12165 CW617N sabbiato acciaio. Marcatura "MADE IN ITALY".
(B) Ogiva di tenuta in ottone normalizzato UNI EN 12164 CW614N. Marcatura "MADE IN ITALY".
(C) Corpo raccordo in ottone UNI EN 12165 CW617N stampato a caldo e sabbiato acciaio o da barra trafilata di ottone normalizzata UNI EN 12164 CW614N. Marcatura "MADE IN ITALY".
- GB** (A) Screw nut hot forged in brass UNI EN 12165 CW617N steel sand blasting. Stamped "MADE IN ITALY".
(B) Ring made in normalized brass UNI EN 12164 CW614N. Stamped "MADE IN ITALY".
(C) Body made in hot forged brass UNI EN 12165 CW617N steel sand blasting or in normalized brass rod UNI EN 12164 CW614N. Stamped "MADE IN ITALY".

ISTRUZIONI DI MONTAGGIO / ASSEMBLING INSTRUCTION

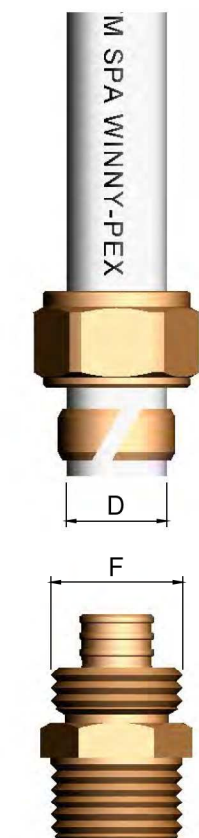

- IT** A) Tagliare il tubo Winny-pex perpendicolarmente al suo asse avendo cura di eliminare eventuali sbavature e/o trucioli residui.
B) Calzare il dado sul tubo.
C) Calzare l'ogiva sul tubo.
D) Inserire il tubo sul corpo del raccordo sino alla battuta meccanica.
E) Serrare il dado a mano sin dove possibile, indi serrare ulteriormente con una chiave idonea come da tabella.

Per la progettazione, l'installazione, il collaudo e la gestione a regola d'arte di impianti idro-termo sanitari si rimanda al rispetto delle disposizioni di norma vigenti: **UNI EN 806 : 2008 e UNI 9182 : 2010**

- GB** A) Cut the Winny-pex pipe perpendicular to its axis using appropriate tool, remove any trimming carefully.
B) Fit the nut on the pipe.
C) Fit the ring on the pipe.
D) Fit the pipe on the body up to the mechanical stop.
E) Tighten the nut by hand till it is possible, then using the tool, tighten the nut following the table value indicated.

For planning, installation, testing and **workmanlike management** of plumbing and heating system, please refer to comply with the provisions of the existing norms: **UNI EN 806 : 2008 e UNI 9182 : 2010**



Tabella filettature / Table thread

D	10	12	15	16	17	18	20	22	25	28	32
F	G3/8	G1/2	G1/2	M24x1.5	M24x1.5	M24x1.5	G3/4	M28x1.5	M32x1.5	M36x1.5	M40x1.5

Tabella serraggio / Table tightening

D	10	12	15	16	17	18	20	22	25	28	32
Giri serraggio Tightening turns	1	1	1	1	1	1	1	1	1	1	1

